


Hliníková příruba točivá ALU

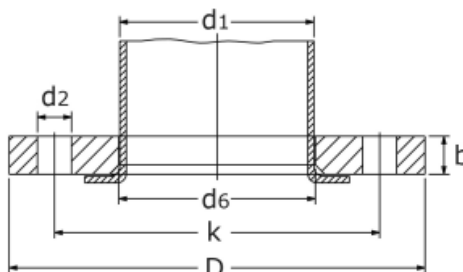

Technický list produktu

DN	d1	D	b	k	d6	d2	M	Kg
10	17,2	90	12	60	19	14	4 x M12	0,196
15	21,3	95	12	65	24	14	4 x M12	0,180
20	26,9	105	12	75	30	14	4 x M12	0,235
25	33,7	115	12	85	36	14	4 x M12	0,240
32	38	140	16	100	46	18	4 x M16	0,509
32	42,4	140	16	100	46	18	4 x M16	0,520
40	48,3	150	16	110	54	18	4 x M16	0,580
50	60,3	165	16	125	65	18	4 x M16	0,700
65	76,1	185	16	145	81	18	4 x M16	0,850
80	84	200	18	160	90	18	8 x M16	1,099
80	88,9	200	18	160	94	18	8 x M16	1,038
100	114,5	220	18	180	119	18	8 x M16	1,180
125	139,7	250	18	210	145	18	8 x M16	1,430
150	168,3	285	18	240	173	22	8 x M20	1,700
200	219,1	340	20	295	225	22	8 x M20	2,486

Akost': AlSi12Cu PN10